

- ◆ RoHS Compliant
- ◆ Operating temperature: 0°C to +70°C
- ◆ Storage temperature: -40°C to +85°C




Electrical Specifications @25°C

Part No.	OCL	LK	DCR	Turns Ratio	HI-POT
LK24125SN	100 KHz, 0.1V	100KHz, 0.2V	1.2Ω Max	1CT:1CT±5%	1500Vrms
	120 uH Min	0.5uH Max			

Continue

Insertion Loss		Return Loss		Cross Talk	Common Mode Rejection
1-100 MHz	100-500 MHz	1-40 MHz	40-500 MHz	1-500 MHz	1-500 MHz
-1.0 dB Max	-3.0 dB Max	-18 dB Min	-17+10*Log(f/40) dB Min	-25 dB Min	-22 dB Min

MECHANICAL(Unit:mm)

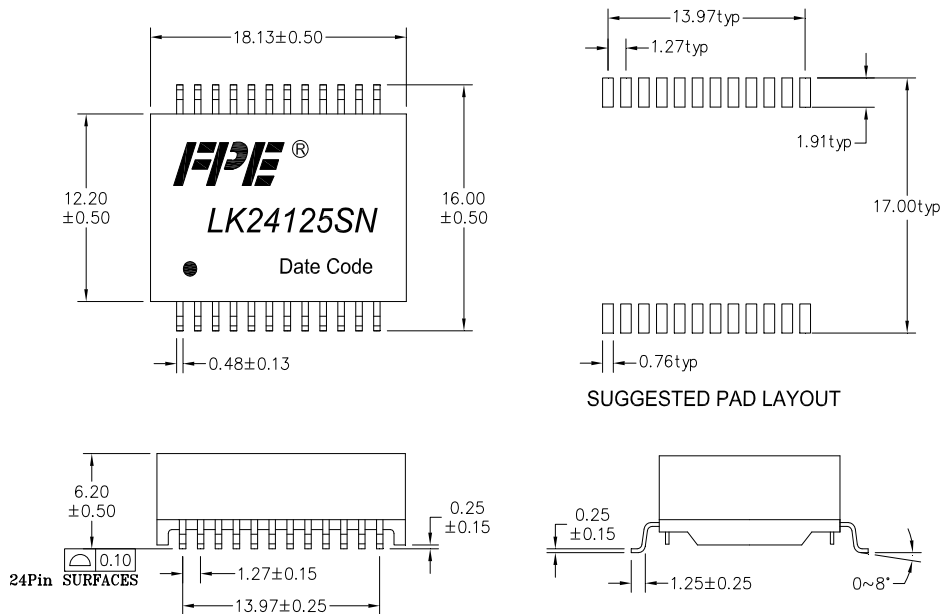

SCHEMATICS

