


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C




Electrical Specification @25°C			
PART No.	Ls@100KHz,0.1V	LK@100KHz,0.1V	Turns Ratio
PW01157ST	1-2	1-2 (short other pins)	(1-2):(7,8-5,6):(3-4)
	90uH±10%	2.0uH Max	1:0.29:0.2±3%

Continue				
DCR			HI-POT	
1-2	3-4	7,8-5,6	PRI,Bias to SEC	COIL,CORE
300mΩ Max	350mΩ Max	50mΩ Max	1500VAC/1mA/60S	500VAC/1mA/60S

**MECHANICAL(Unit:mm)**

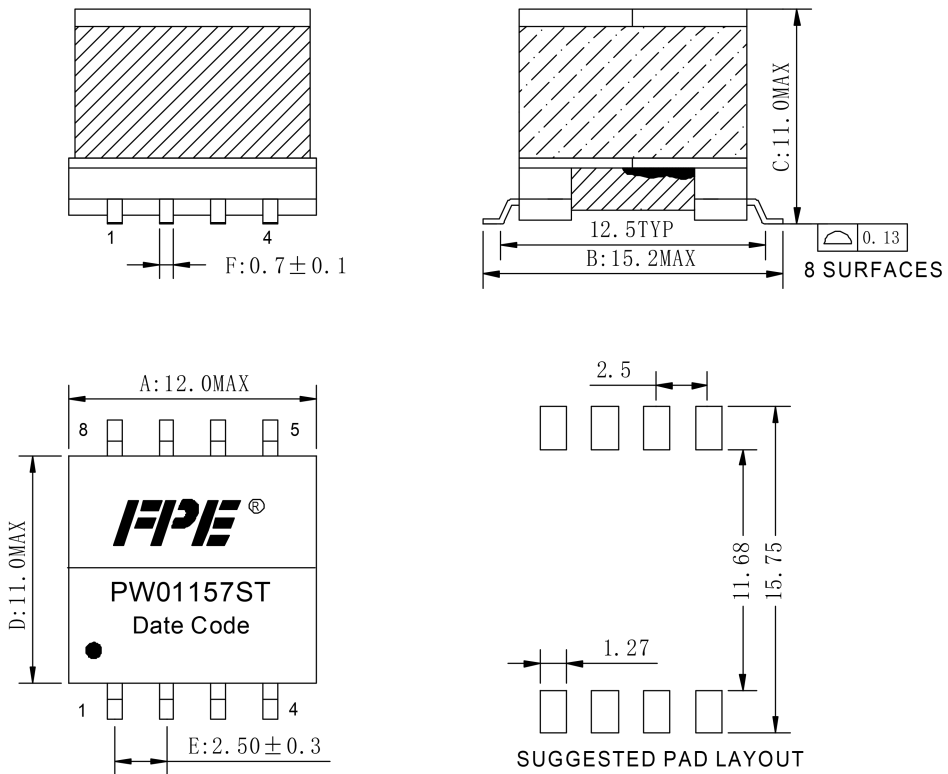

**SCHEMATICS**

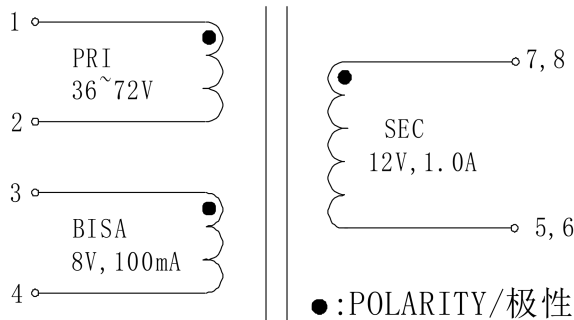

NOTE: PIN5, 6&7, 8 must shorted on PCB