


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C



Electrical Specification @25°C			
PART No.	Ls@100KHz, 1.0V	LK@100 KHz, 1.0V	Turns Ratio@20 KHz, 0.1V
PW07207ST	1,2-3,4	1,2-3,4 (Short other pins)	(1,2-3,4):(5-6):(9,10-11,12)
	67uH±10%	3.0uH Max	27:11:4±3%

Continue				
DCR@25°C			Hi-pot	
1,2-3,4	5-6	9,10-11,12	PRI,AUX to SEC	PRI,AUX to CORE
250mΩ MAX	300mΩ MAX	30mΩ MAX	1500VAC/5mA/60Sec	500VAC/5mA/60Sec

MECHANICAL(Unit:mm)

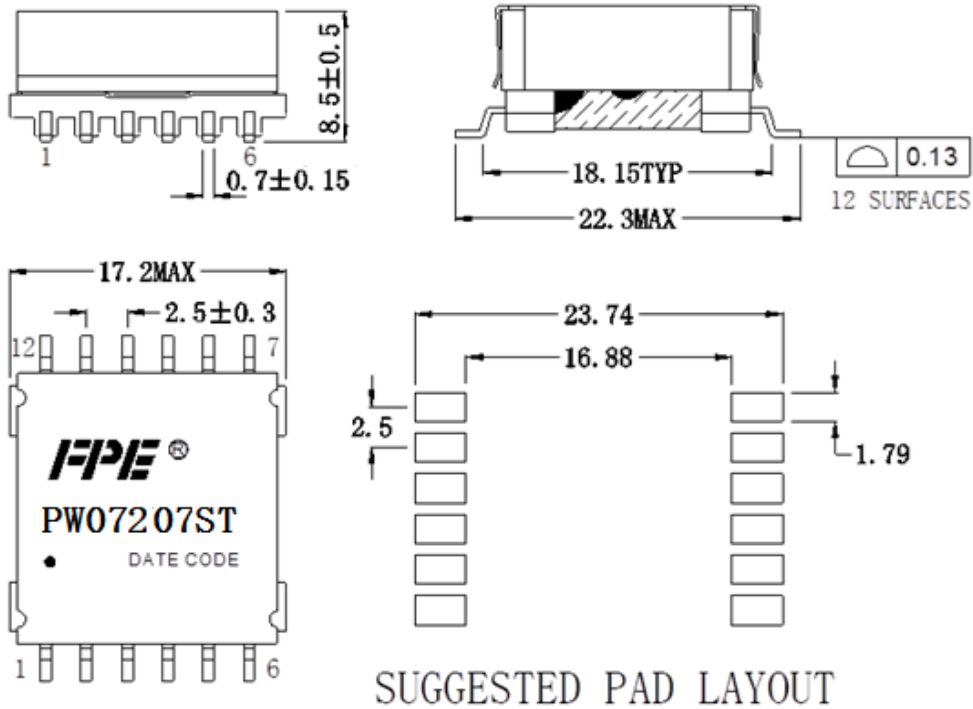

SCHEMATICS

