


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C




Electrical Specification @25°C			
PART No.	Ls@100KHz,0.1V	LK@100KHz,0.1V	Turns Ratio
PW07217ST	1,2-3,4	1,2-3,4 (Short other pins)	(1,2-3,4):(5-6):(7-10):(8,9-11,12)
	100uH±20%	1.0uH Max	16:10:4:10±3%

Continue					
DCR				HI-POT	
1,2-3,4	5-6	7-10	8,9-11,12	PRI TO SEC	PRI,SEC to CORE
38mΩ Max	350mΩ Max	140mΩ Max	19mΩ Max	1500VAC/1mA/60Sec	600VAC/1mA/60Sec

MECHANICAL(Unit:mm)

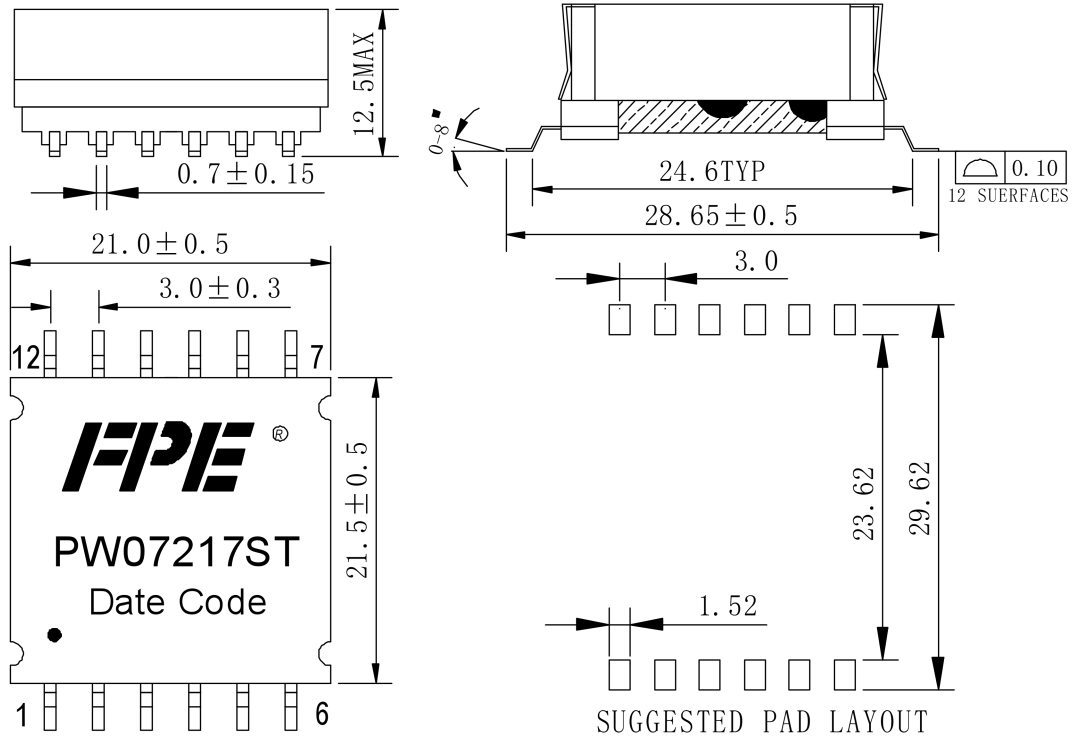

SCHEMATICS

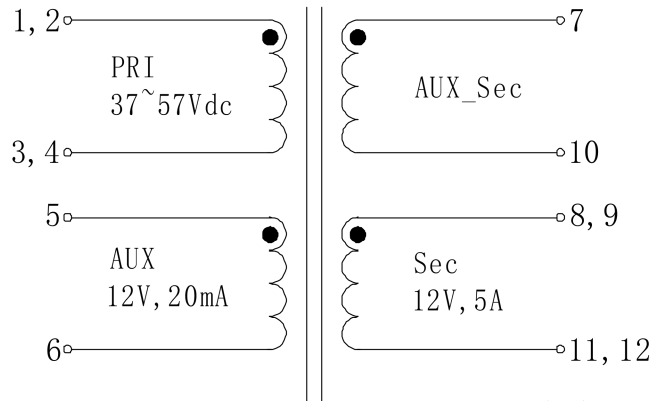

●:POLARITY/极性

NOTE:PIN1, 2&3, 4&8, 9&11, 12 must shorted on PCB