




- ◆ RoHS Compliant
- ◆ Impedance=75 Ω
- ◆ Frequency 5-1200MHz
- ◆ Operating temperature: -40°C to +85°C
- ◆ Storage temperature: -40°C to +85°C

Electrical Specification @25°C		
PART No.	Insertion Loss	Turns Ratio
RT032037SN	5-1200MHz	(1-2):(2-3)
	0.5dB Max	3:2±5%

Continue	
Amplitude Unbalance (Nominal 0 dB)	Phase Unbalance (Nominal 180°)
5-1200MHz	5-1200MHz
0.8dB Max	±10°typ

MECHANICAL(Unit:mm)

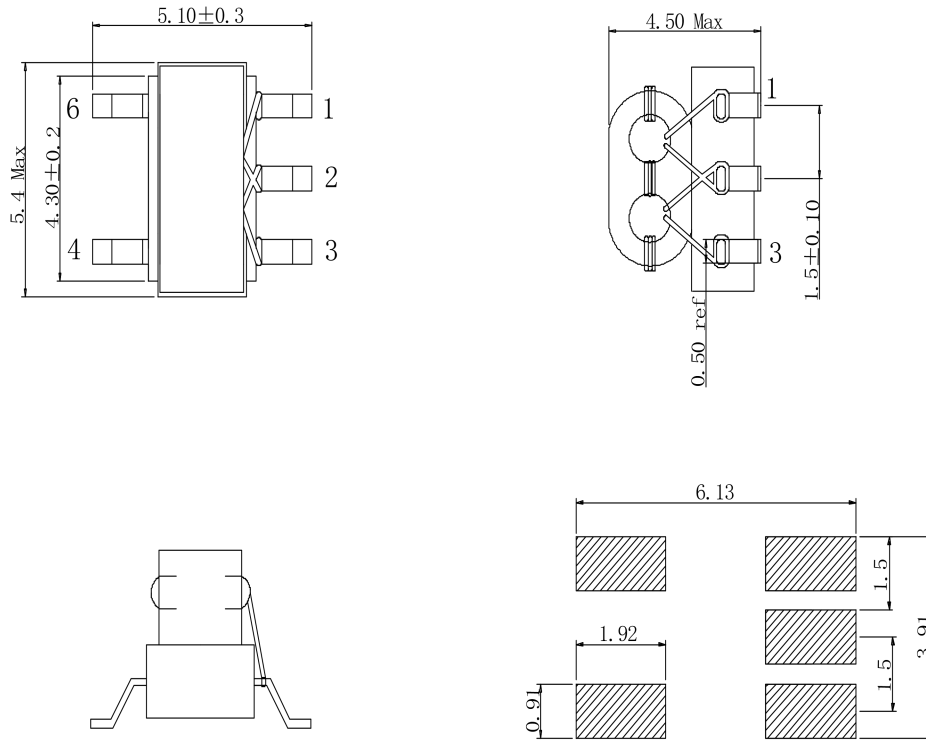

SCHEMATICS

